



1744 FORREST WAY
CARSON CITY, NV 89706


PHONE (775) 841-5444

FAX (775) 841-0342

WEB www.cable-tec.com

EMAIL info@cable-tec.com

Aluminum Reverse Threaded Barbed

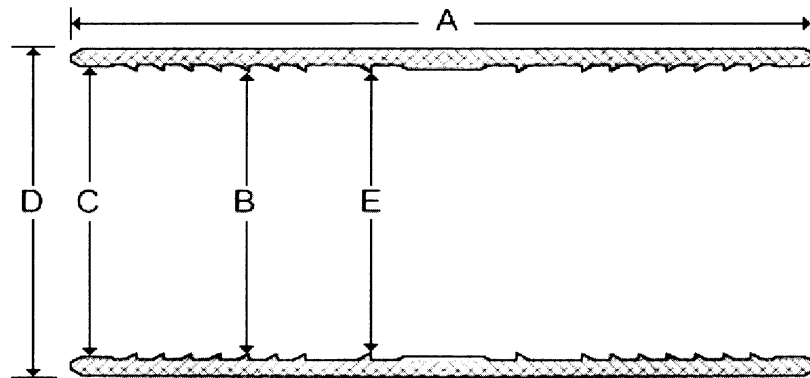

This series of aluminum air tight couplings incorporates the same reliable, full circumference seal used in our barbed ring compression couplings. But unlike other one piece plastic or aluminum compression couplings that have to be installed with some type of coupling press, Cabletec's multiple lead barbed ring coupling can be installed like any ordinary reverse thread coupling. Instead of a coupling press, a special wide pitch, fast traveling thread is used to force the innerduct over the barbed ring seal.

From a user's standpoint, the coupling would be installed exactly like any common reverse thread coupling. Due to the wide pitch angle of the multiple lead thread, only 10 complete turns are required to install these couplings. Another important feature of the coupling is that the outside diameters are small enough to allow these couplings to be pulled into primary ducts or through plow chutes.

These threaded couplings permit tensile loading as high as conventional reverse couplings and provide a positive reliable seal.

PART #	DIM A	DIM B	DIM C	DIM D	DIM E
ASB1.315	4.00	1.290	1.390	1.500	1.275
ASB1.660	4.00	1.635	1.735	1.900	1.620
ASB1.900	4.00	1.875	1.975	2.100	1.860
ASB2.375	4.00	2.350	2.450	2.610	2.335

Note: Listed sizes are stock items, but custom sizes can be made

PART #	AIR (psi)	PULL OUT
ASB1.315	270	1175
ASB1.660	255	1600
ASB1.900	220	1950
ASB2.375	255	2125

